

# POS PRINTER




## SLK-T42

- Compact Size
- Tear bar type / Auto cutter (optional)
- Dual interface : USB + Serial
- High speed printing : 200mm/sec



### APPLICATIONS

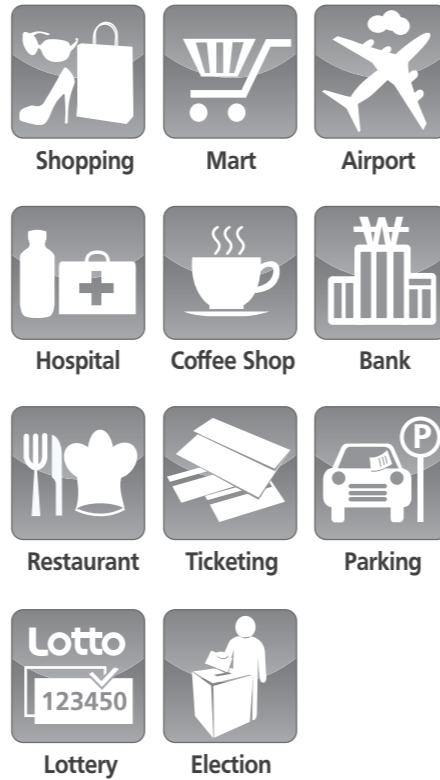

2inch Compact size Thermal Printer

## SLK-T42



Item	Specification	Item	Specification			
PRINTING	METHOD	Direct Thermal	SENSOR	Paper End, Cover Open		
	SPEED	Max. 200mm/sec		CASH DRAWER DRIVER	2 circuits (24V, 1A max)	
	WIDTH	54mm(432 Dots/Line)			INTERFACE	USB(A type)+Serial(RS-232C) Built-in
	RESOLUTION	203DPI		EMULATION		ESC/POS Command Compatible
	DOT PITCH(mm)	0.125mm x 0.125mm			DRIVER	Windows Printer Driver(8, 7, XP, 2000, 2003, VISTA, 32&64bit, XP Embedded), WEPOS, OPOS, Linux, JavaPOS
DIRECTION	Unidirectional with Friction Feed	POWER	TYPE	External SMPS		
CHARACTER PER LINE	Font A (12 x 24)		36 columns	AC		100 ~ 240Vac 50/60 Hz
	Font B (9 x 17)		48 columns	DC		24Vdc / 2.5A
PAPER	TYPE	Thermal Paper	AUTO CUTTER	TYPE		Guillotine
	WIDTH	59mm ± 0.5mm		LIFE	1,000,000 Cuts	
	THICKNESS	0.06mm ~ 0.09mm		PAPER THICKNESS	0.06 ~ 0.09mm	
	ROLL DIAMETER	Max. ø 60mm	CUTTING METHOD	Partial Cut		
RELIABILITY	ROLL CORE INNER	12.5mm ± 0.5mm	TEMPERATURE	OPERATION	0 ~ 45°C	
	TPH LIFE	100Km		STORAGE	-20 ~ 60°C	
CHARACTER SET	MCBF	60,000,000Lines	HUMIDITY	OPERATION	35 ~ 80%	
	ALPHANUMERIC CHARACTER	95		STORAGE	10 ~ 90%	
	ALPHANUMERIC CHARACTER	128 x 18Page (1 space page)	WEIGHT	INCLUDE AUTO CUTTER	0.88kg	
INTERNATIONAL CHARACTER	14	DIMENSION(W x D x H)		120 x 182 x 106 mm		
BARCODE	EAN-8, EAN-13, Code 39, ITF, UPC-A, Codabar, Code 93, Code 128, PDF 417(2D)		COLOR	Cool grey, Ivory		

#### INTERFACE



#### ACCESSORY



Melody box

