



Touch Monitor **PM Series**

PM Series

Specification

PM-100/120/150 ; KM-190




	PM-100	PM-120	PM-150	KM-190
Display				
Display Type		Active Matrix TFT LCD		
LCD Size	10.4"	12.1"	15"	19"
Display Area (mm)	210W× 157H	245H× 184H	304× 228H	304× 228H
Monitor Dimensions (W*H*D)	220× 207× 172 mm	326× 266× 172 mm	381× 312.5× 172 mm	381× 312.5× 172 mm
Max. Resolution	800× 600	1024× 768	1024× 768	1280× 1024
Color		16.7 million		
Brightness	185 cd/m²	250cd/m²	260 cd/m²	300 cd/m²
Contrast Ratio	250:1	400:1	450:1	450:1
Input Signal		RGB Analog		
Input Connector		D-Sub 15 Pin Female		
Mechanical				
Touch Panel	default Taiwan 5-wire Resistive or ELO by option (Capacitive or SAW touch by option)			
Color of Case	Black with Sliver front bezel (optional Black front bezel)			
Power Supply	24W / 24W / 36W / 48W 12V External Power Adaptor			
Temperature	Operation : 0˚ C to 40˚ C			
Humidity	10% to 90%			
Optional Device	Embedded MSR Reader (Triple Track by K/B Wedge or RS-232 Interface)			

KM-190



Open-frame LCD Kit

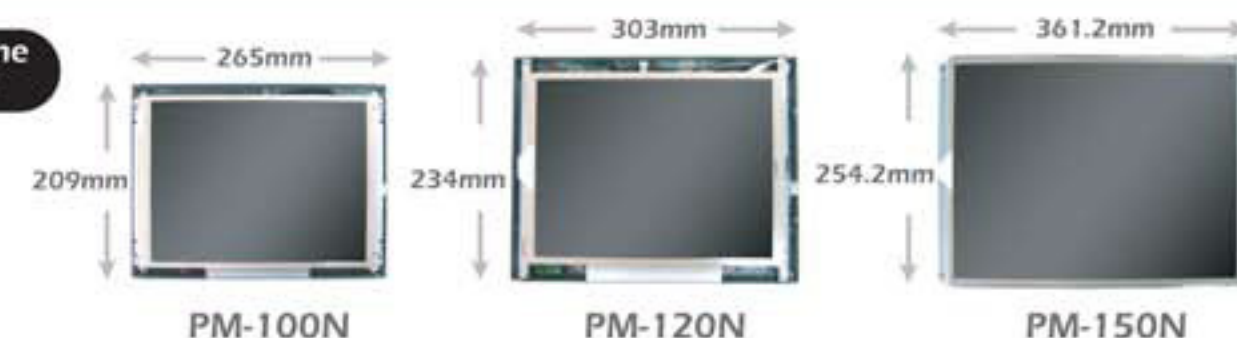

PM-100

- 10" LCD with Touch Screen
- Specific strong stand built for POS application
- Optional Magnetic Stripe Reader
- Optional RS-232/USB Touch
- Stand/VESA mountable

PM-120

- 12" LCD with Touch Screen
- Specific strong stand built for POS application
- Optional Magnetic Stripe Reader
- Optional RS-232/USB Touch
- Stand/VESA mountable

PM-150

- 15" LCD with Touch Screen
- Specific strong stand built for POS application
- Optional Magnetic Stripe Reader
- Optional RS-232/USB Touch
- Stand/VESA mountable

KM-190

- 19" LCD with Touch Screen
- (Option built in VFD)
- (Option multi-Media Card reader with DVI ready)
- Built-in Speaker
- Colorful bezel by option
- Stand/VESA mountable